

## Touch Latch

SEL-PRT-02673 | Rev. 1

### Part 2

### Enhancement Installation




#### SYSTEM PREPARATION



When using the **Touch Latch** you must remove the **Remote Stop** from the **Sliding Track**.

A **1-inch** space between the rear of the Door and the **rear stud** is required.

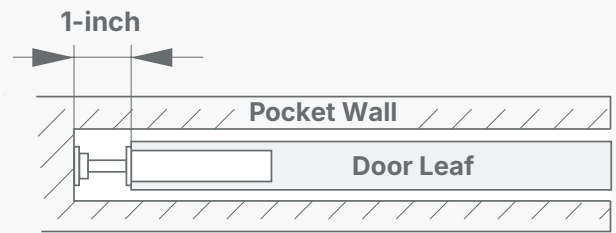

#### 1. DRILL DOOR LEAF

The **Touch Latch** is fitted to the rear of the door using a **1"** auger or spade bit.

**NOTE** The **Touch Latch** is fitted approximately the same height as the **Door Handle / Finger Pull**.



#### 2. FIX LATCH TO DOOR

Insert the **Touch Latch** and fix into place using the **Screws** provided.



#### 3. FIX COUNTER PLATE

Fix the metal **Counter Plate** to the corresponding rear stud.

**IMPORTANT** Ensure the height corresponds to the height of the **Touch Latch** in the Door. When using the **NFR** concealed kit this will need to be packed out.