

Installation Guide

Soft close

Standard Frame - All Trims

ACCESSORY OVERVIEW

Modified March 2021 | Revision 002



The following instructions demonstrate how to install the **Soft close device to all Enigma Pocket Door Trims** (*excluding the NFR Concealed*).


For **Frame & Trim** installation guidance please use the instructions supplied with the kit.

Scan QR for Installation Guides:




IMPORTANT

- › Not suitable for use with acoustic Enigma pocket doors.
- › Do not fit brush seals as they will restrict the closer action.

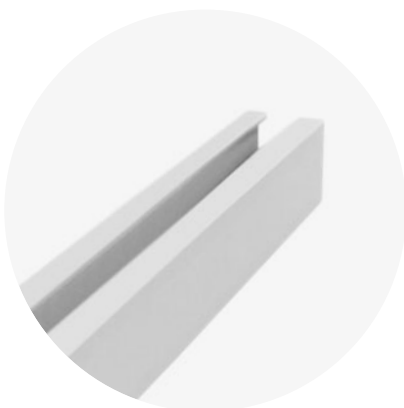

1. Prepare Track

Lay the Sliding Track on a flat surface with the open channel facing upwards.

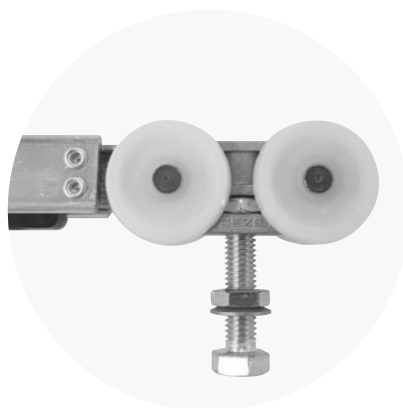

2. Insert Hanger-bolts

Insert the Hanger-bolts into the Closer Cassette inserting from the underneath as shown.



3. Add to Track

Insert the Closer Cassette into Sliding Track. (Opposite end to the Remote Stop)

IMPORTANT

The black-plastic cassette should be opposite the Remote Stop. Ensure that the closer is the correct way up.



4. Prepare Trigger Arm

Locate the white plastic End-buffer into the plastic Trigger Arm as shown.



5. Add Trigger Arm to Track

Slide the assembly into the Track. Ensure the metal guide-plate of the Trigger Arm is located within the groove of the Track.
(It may be necessary to wind-out the small black lock-screw in the end of the Trigger Arm to allow smooth passage.)



6. Soft Close & Open

IF **NOT** SPECIFIED - MOVE TO NEXT STEP
Add the additional white End-buffer and plastic Trigger Arm to the other end of the track.



7. Fit End-buffer


Once in place, lightly tighten-down the hex bolt in the white End-buffer to secure temporarily.

(Final adjustments will need to be made once door leaf is installed)



8. Test Mechanism

By partly screwing in the Hanger-bolts it will be possible to test the action of the mechanism and make sure it is orientated correctly.

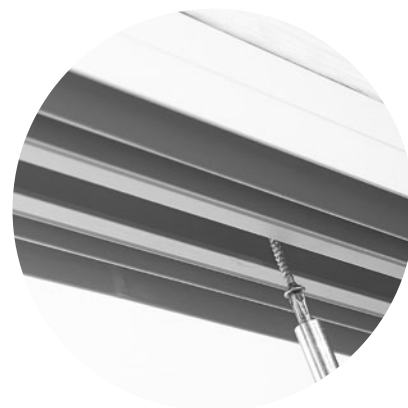


9. Fit Track

The Track can now be fitted as per the main Frame & Trim Installation Guides.

(Once the track has been secured it will be possible to determine the final position of the trigger before you install the door by cutting length of timber to the width of the door and using it to position correctly.)


DOOR LEAF INSTALLATION

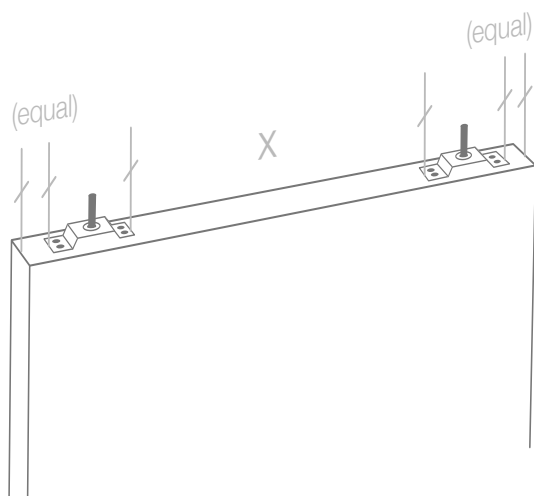

10. Install Head Brackets

Position and fit the Head Brackets to the door leaf as shown.

CODE	SPACING
ES01	X = 314mm
ES02	X = 640mm
ES03	X = 523mm
ES04	X = 1030mm

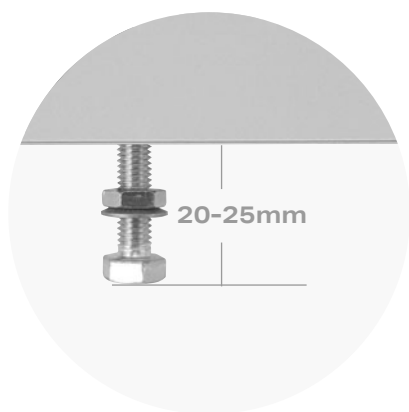

11. Prepare Hanger-bolts

Screw the Hanger-bolts into the Soft-closer Cassette. Screw the thread so that they sit **20-25mm** beneath the track.



12. Hang Door

The door can now be offered up and the brackets (fitted to the top of the door) hung onto the Hanger-bolts. Once in-place the locking nuts are tightened.



13. Adjust Stop

Once the Trims are fitted, adjust the stop(s) inside the track to ensure the door(s) stop in the correct position.

ENIGMA[®]

POCKET DOORS

Refer to the main
Installation Guide provided
with the system to **complete**
your sliding pocket door.



Scan QR to view
Installation Guides



For help and advice with your installation
contact our experienced team:

020 3880 0339

Email sales@enigmapocketdoors.com