


Self Closer

Installation Guide

SEL-PRT-01526 | Rev. 3


SYSTEM PREPARATION

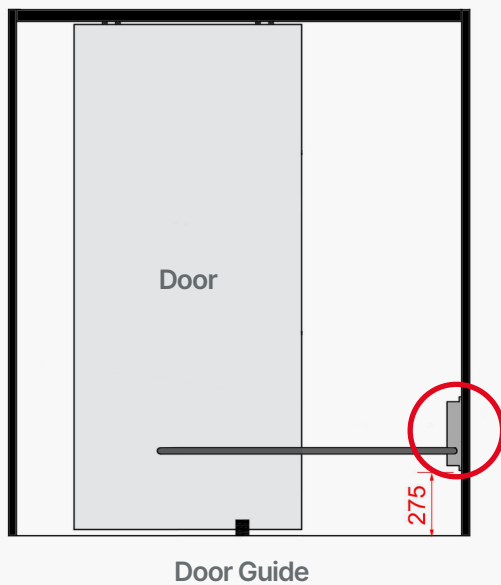

The Enigma pocket door system can be provided with an automatic Self Closer. The Closer is provided with infinite adjustment providing an extremely user friendly experience. Suitable for doors up to 900mm wide.


IMPORTANT

1. Not suitable for Enigma Acoustic Pocket Doors.
2. Do NOT fit Brush Seals they will restrict the closing action.

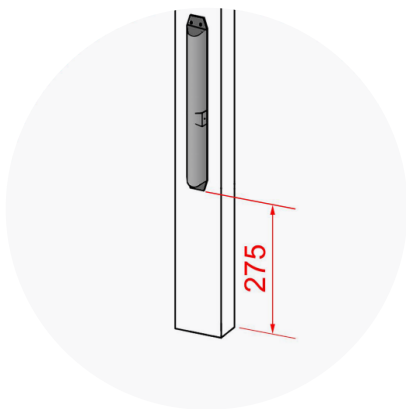


1. FIT CLOSER

Fit the Closer to the Studwork as pictured, **275mm** from the bottom stud to the underside of the Closer.

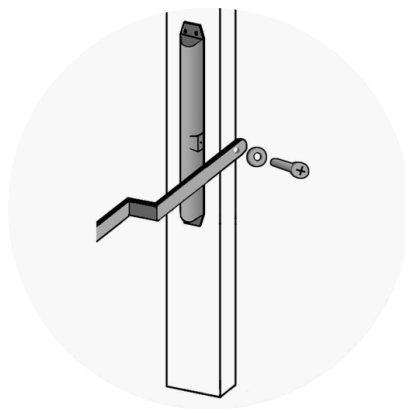


2. FIX CONNECTOR

Fix Connector Bar to the Closer horizontally with the dog-leg towards the centre using the serrated washer and bolt provided.


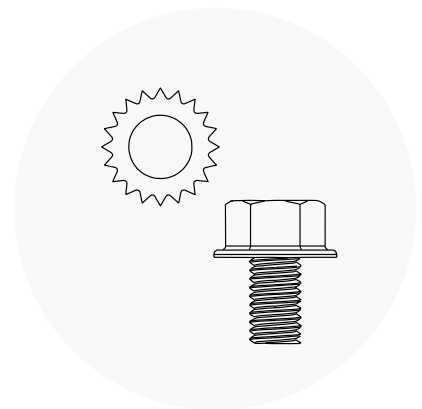


SELF CLOSER INSTALLATION

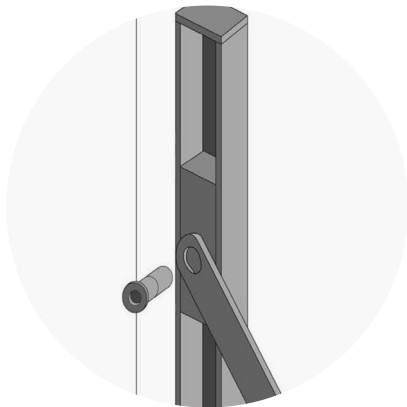



3. CONNECTING BAR

Fix Connector Bar to Sliding Shuttle in Sliding Rail.

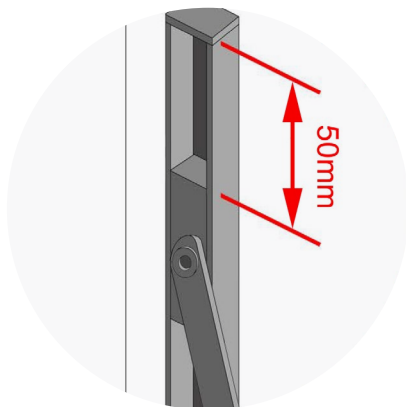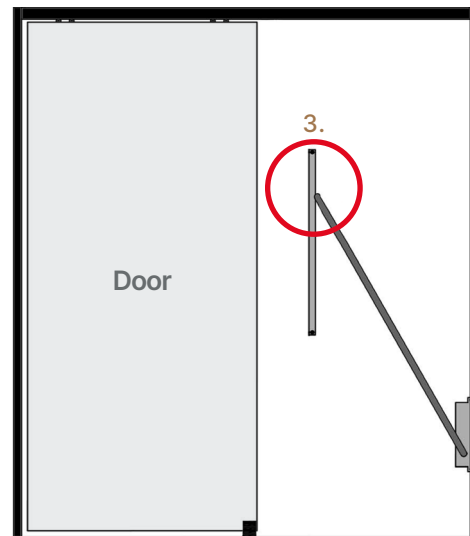


4. MARK DOOR

Fully open the door, raise the arm and Sliding Rail to the rear edge of the door. Position Sliding Rail so the Sliding Shuttle is **50mm** from the top of the rail and pencil mark the top and bottom.

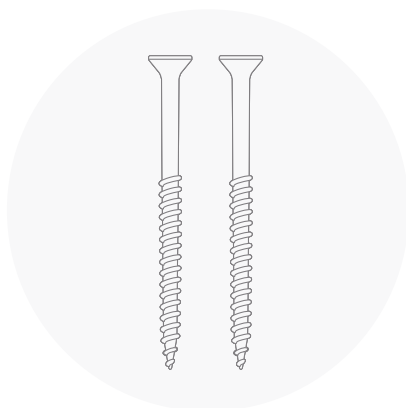
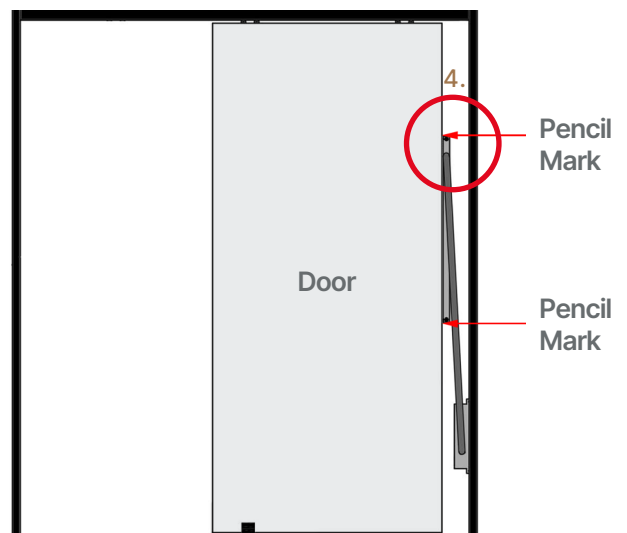


5. FIX TO DOOR

Close door. Using the pencil marks made in **Step 4** align the Sliding Rail and screw-fix using the Screws provided to the rear of the door.

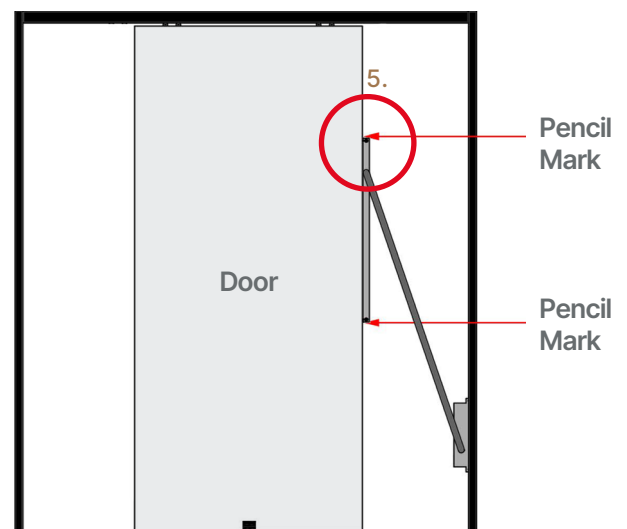

SELF CLOSER ADJUSTMENTS

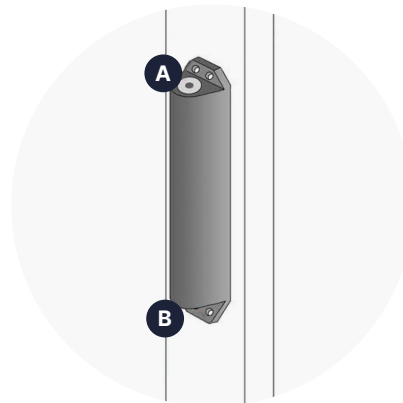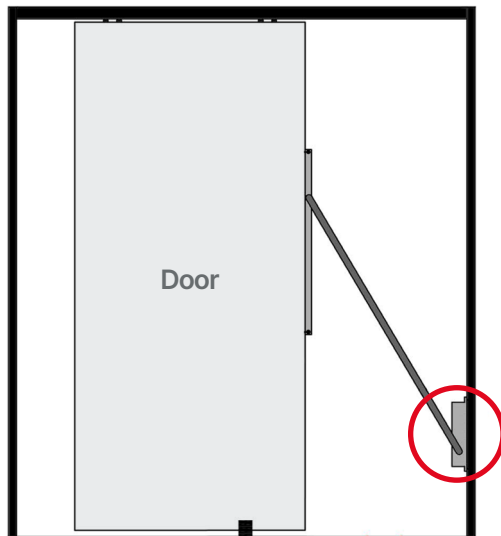

- A** Power
- B** Valve 1

6. ADJUST VALVE 1

From fully open to nearly closed.

Turn Clockwise = Decrease Speed

7. TUNE POWER


Adjust Power if required.

Turn Clockwise = Increase Power

8. STOP BLOCK

Adjust height of Stop Block and cushion to required position.

REMOVE DOOR STOP CLIP

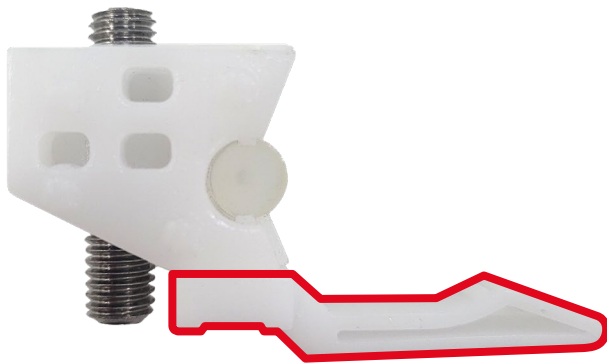

9. REMOVE CLIP

Before fitting the Door Stop into the Track please remove the Clip (as shown) and discard.

halo
assist

For help and advice with
your installation contact
our technical team:

Installation support **020 3880 0339**

Email sales@enigmapocketdoors.com

