

INSTALLATION INSTRUCTIONS

Soft close

Standard Frame - All Trims



The following instructions demonstrate how to install the Selo **Soft close** device to all Enigma pocket door trims (excluding the NFR Concealed). For **Frame installation** guidance please use the instructions supplied with the kit, or visit enigmapocketdoors.com for further information.

IMPORTANT

- › Not suitable for use with acoustic Enigma pocket doors.
- › Do not fit brush seals as they will restrict the closer action.

SOFT CLOSER (Soft close in one direction only)

Modified July 2020 | Revision 001



- 1** Lay the sliding track on a flat surface with the open channel facing upwards.

Note The remote stop is not required - Remove if fitted.



- 2** Insert the closer cassette from the opposite end with the spring facing up.

- 3** Locate the white plastic end buffer into the plastic trigger arm as shown.



- 4** Slide them together into the track taking care to locate the metal guide plate on the plastic trigger arm into the associated groove in the track.

Note It may be necessary to wind out the small black lock screw in the end of the trigger arm to allow the guide plate smooth passage.



- 5** Once in place, lightly tighten down the hex bolt in the white end buffer to secure temporarily.

- 6** By partly screwing in the hanger bolts it will be possible to test the action of the mechanism and make sure it is orientated the correct way around.

- 7** The track can now be fitted as per **step 4**.

Note Once the track has been secured it will be possible to determine the final position of the trigger before you install the door by cutting length of timber to the width of the door and using it to position correctly.

SOFT CLOSE & OPEN

IMPORTANT Do not insert the remote stop. If it is inserted then remove.

- Complete **steps 1-4** then add the additional white end buffer and plastic trigger arm to the other end of the track, once the closer cassette has been inserted.

DOOR LEAF INSTALLATION

- Position and fit the head brackets as the dimensions below.
(See *diagram 9*)

ES01: X = 314mm

ES02: X = 640mm

ES03: X = 523mm


ES04: X = 1030mm

- Screw the trolley bolts into the soft closer cassette and wind them up so that they sit **20-25mm** beneath the track.

- The door can now be offered up and the brackets fitted to the top of the door hung onto the trolley bolts and the locking nuts tightened.

- Once the trims are fitted adjust the stops inside the track to ensure the doors is stopped in the correct position.

- Refer to the **Main Installation Instructions** to complete your Enigma sliding pocket door.

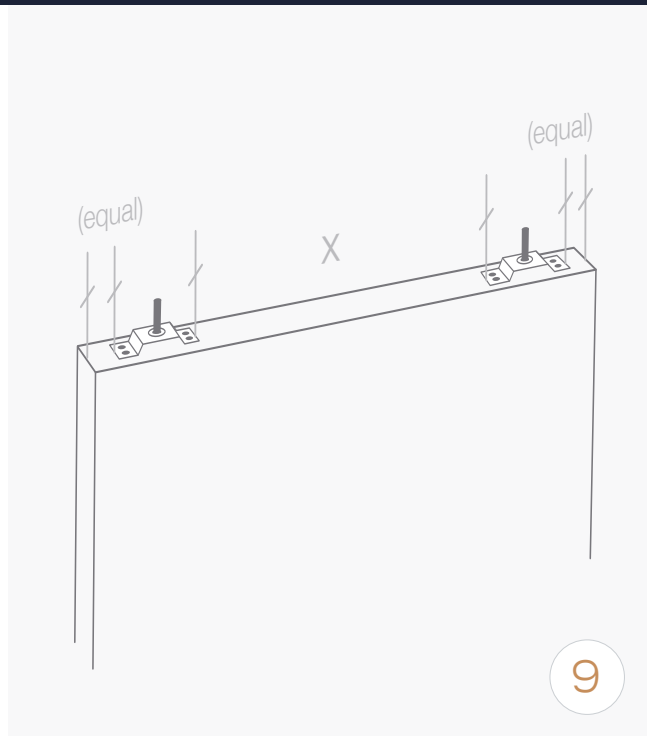

For help and advice with your installation contact our experienced team:

020 3880 0339

Email sales@enigmapocketdoors.com

