

INSTALLATION INSTRUCTIONS

Touch Latch


SYSTEM PREPARATION

Modified February 2020 | Revision 001



When using the touch latch **you must remove the remote stop from the sliding track.**

A 25mm space between the rear of the door and the rear stud is required.

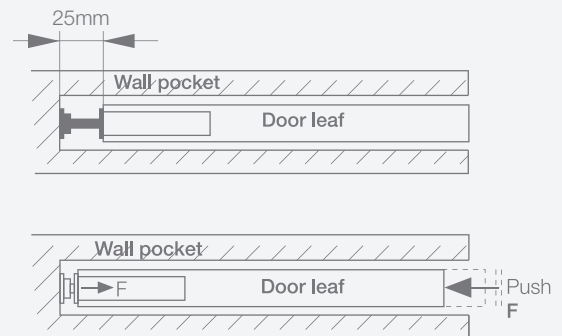

1. Drill Door Leaf

The touch latch is fitted to the rear of the door using a 25mm auger or spade bit.



2. Fix Latch

Insert the touch latch and fix into place using the screws provided.



3. Fix Counter Plate

Fix the metal counter plate to the corresponding rear stud.

IMPORTANT

Ensure the height corresponds exactly to the height of the touch latch in the door. When using the NFR concealed kit this will need to be packed out.